




GPRS/GSM SWITCH (GATE CONTROLLER) ESIM110

ESIM110 automatic gate controller (remote relay over GSM) is used to open gates, lift road barriers or turn on the electronic device remotely over GSM network. Using this device you can also remotely turn on or off the security system.

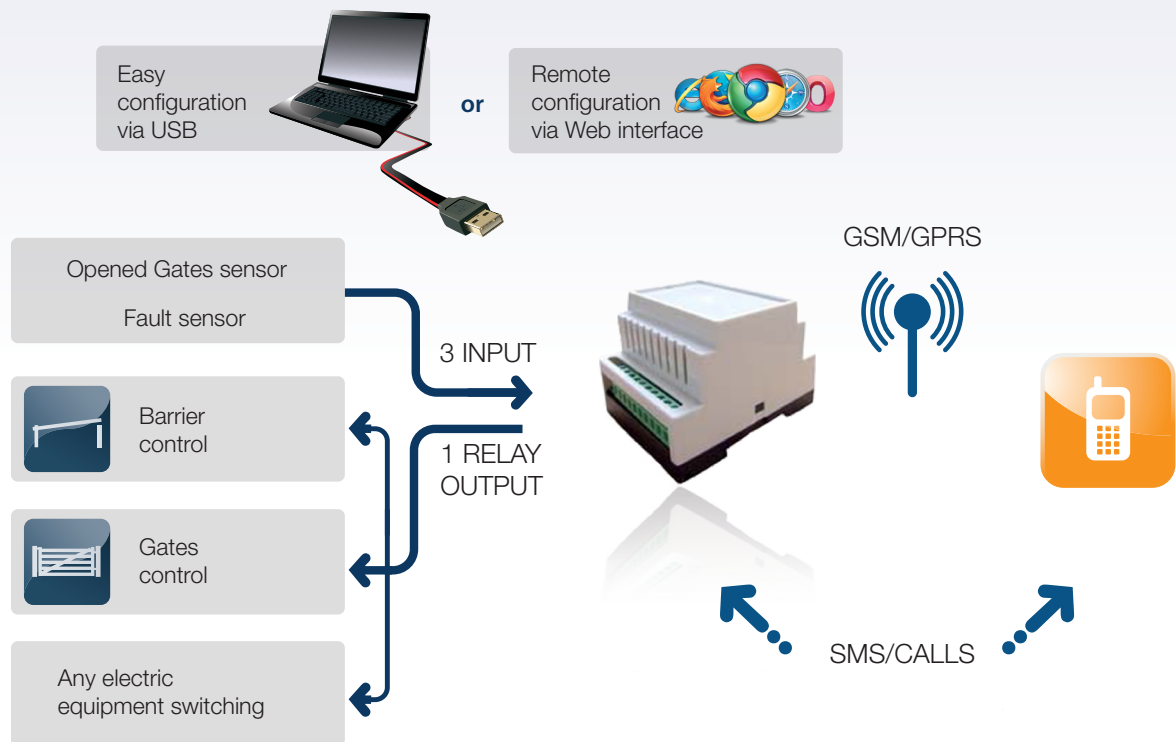

WHY CHOOSE ESIM110?

- Add or delete users by name
- Possibility to open and close the gates at specific time
- Possibility to add temporary acces for uses
- Event log
- Notification SMS about a fault in gate or other automatics device over GSM.
- Opening personal house gates
- Turning ON/OFF an electronic device for a specified period, e.g., aquarium lighting, turning on the pump, watering, controlling heating in premises etc.
- Configuration using PC via USB interface or remote configuration via Web interface

OPTIONAL

- 2 RELAYS
- High IP rated enclosure
- DIN rail mount enclosure

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|-----------------------|
| GSM module frequency | 850/900/800/1800 MHz |
| Supply voltage | 10-24V AC/DC |
| Maximum consumed power | 3 W |
| Dimensions | 70x85x57mm |
| Operating temperature range | -20...+55°C |
| Output type | Relay (Normally Open) |
| Number of administrators | 5 |
| Number of users | 500-1000 |
| Interface | USB, WEB |