

Duolinks SW24 VPN Plus

DUAL WAN VPN + DNS LOADBALANCER



Overview

The Syswan Technologies Duolinks SW24 VPN Plus high performance Dual WAN router featuring DNS load balancing, IPSec VPN encryption and VPN Tunnel Clustering offers the ultimate in data delivery and protection over the Internet. These unique features of the Duolinks SW24 VPN Plus makes it a must have for any organization which needs to provide secure, fast, and reliable Internet or Extranet services to local users, remote users and to customers at a very low cost.

Maximize available bandwidth

The Duolinks SW24 VPN Plus has two WAN ports that allows connection to two separate broadband links. This design feature allows for intelligent load balancing to maximize the available bandwidth whilst managing and prioritizing traffic flow for fast and redundant Internet connectivity.

Easy to install and manage

The Duolinks SW24 VPN Plus is easy to configure locally or remotely using your Internet browser via a standard (HTTP) or a secure management interface (HTTPS). With its easy-to-use Configuration Interface, you can set Alerts to be sent via email, System Logs to be sent to a Syslog server, as well as monitor network activity via SNMP.

Intelligent DNS load balancing

The DNS load balancing feature of the Duolinks SW24 VPN Plus acts as an authoritative Domain Name Server (DNS) for your domains hosted on your network. Intelligent inbound DNS load balancing and failover features not only increases the available bandwidth to your remote Internet users, but also ensures your Websites and other Internet services are always running in a failsafe and secure environment even with the added risks of broadband outages.

The Duolinks SW24 VPN Plus can host up to 6 domains (SOA entries). It offers up to 2 local or remote mail exchange (MX) entries and up to 30 different services (type A DNS entries) per domain, each pointing to one or more servers on your local network.

Secure IPSec Virtual Private Networking (VPN)

The Virtual Private Network (VPN) capability of the Duolinks SW24 VPN Plus can maintain up to 25 encrypted IPSec VPN tunnels simultaneously and provides remote offices and traveling users with the ability to connect securely to your network.

The IPSec implementation of the Duolinks SW24 VPN Plus provides industry standard security with DES, 3DES or AES (128-bit) encryption and MD5 or SHA hashing algorithm for authentication.

VPN Tunnel Clustering


The VPN Tunnel Clustering feature of the Duolinks SW24 VPN Plus router allows for VPN tunnels to be configured into a Meshed Group which is then perceived as a single VPN tunnel. Its built-in VPN failover architecture ensures that the clustered VPN tunnels between networks remains fully functional even in the event of a failing WAN link at the local or remote end.

Flexible configurations

The flexible network configuration capabilities of the Duolinks SW24 VPN Plus allows it to be used in networks which support Static Routing, RIP or Dynamic Routing. With UPnP you can automatically open and close networking ports as required by certain applications. QoS helps give priority to critical traffic on your network taking advantage of the maximum available bandwidth at all times. With these powerful features, the Duolinks SW24 VPN Plus can be quickly and easily integrated into any network.

Traveling users can benefit from the SYSWAN VPN Client software to connect securely to your network remotely via the Internet (Free 30 day trial version available).

Example of use :

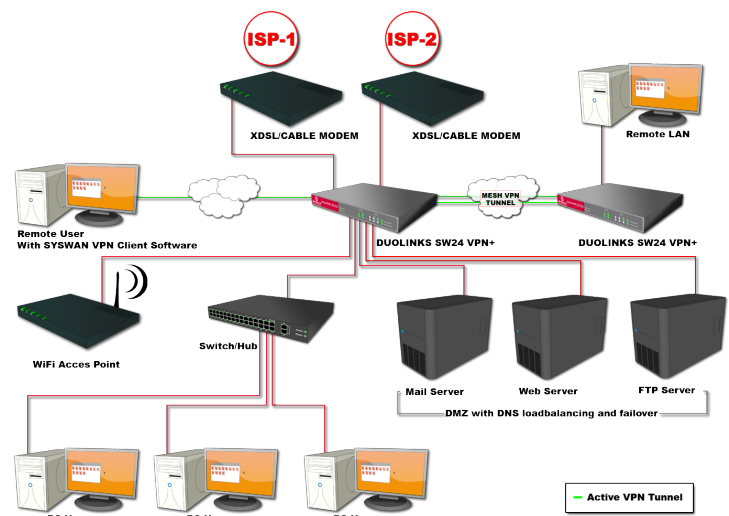

Features

Intelligent Load Balancing : Use two WAN ports simultaneously to increase the available bandwidth. Set the load balancing values for each WAN port individually and configure the load balancing algorithm to work by IP numbers, Packets, Bytes or Sessions to suite your needs.

Multiple Connection Options : Use broadband access from any broadband provider including Leased links (T1). All standard xDSL, Cable and Satellite modems and connection methods are supported, including Fixed IP, Dynamic IP, PPPoE, multiple-session PPPoE and PPTP.

Virtual Private Network (VPN) : Up to 25 simultaneous Remote-to-LAN or LAN-to-LAN IPsec VPN tunnels with VPN Clustering.

DNS Load Balancing (Inbound) : Built-in authoritative Domain Name Server (DNS) with inbound load balancing and DNS failover.

Secure Management : Secure access to the configuration interface locally from within your network or remotely via the Internet.

SPI Firewall : Industry standard protection for any network using built-in advanced Stateful Packet Inspection technology against malicious attacks.

Access Filters and URL Blocking : Controls Internet access and available applications for network users. Up to five user groups can be defined with each group assigned different access rights.

Multi DMZ : Supports up to 8 Static IP Addresses per WAN port.

Virtual Servers : Allows remote users to access servers on your network. Easily enable standard services such as Web, FTP or Email or define your own servers and services.

Special Applications : Manage applications which do not directly work behind a firewall (example: online games).

Dynamic DNS : Allows the use of a Domain Name even when a fixed IP Address is not available.

QoS : Gain control over critical applications by assigning priority to your network traffic (example: VoIP).

UPnP : Allows easy set up and configuration of an entire network as well as enabling automatic discovery and control of networked devices and services.

4 Port Ethernet Switch : 4 port 10/100 Mbps Ethernet Switch for easy integration into an existing network.



Duolinks SW24 VPN Plus back panel

Specifications

Hardware : ADM5120 175MHz/227MIPS Processor - 2Mb FLASH / 16Mb DRAM

Network :

- WAN : 2 port 10/100Mbps RJ45 Auto Sensing MDI/MDIX – IEEE 802.3/802.3u
- LAN : 4 port 10/100Mbps RJ45 Auto Sensing MDI/MDIX – IEEE 802.3/802.3u

Throughput :

WAN : Over 40 Mbits per second. **VPN** : Over 10 Mbits per second.

Load Balancing and Failover : Inbound (DNS) and Outbound load balancing by Bytes, Packets, Sessions or IP Addresses with automatic failover.

Protocols :

- Security: NAT, UPAP, CHAP
- Network: TCP/IP, HTTP, DHCP, PPP, UPAP, PPPoE, Multi-session PPPoE, ICMP, ARP proxy.
- Routing: static route for WAN & LAN, RIPv1, RIPv2.
- Connection: static IP, dynamic IP, PPPoE, PPTP.

VPN : 25 IPsec tunnels. Up to 4 VPN Clusters. DES, 3DES or AES (128-bit) encryption. MD5 or SHA authentication. Manual Preshared keys or Internet Key Exchange (IKE).

VPN Pass Through : L2TP, PPTP and IPsec (NAT-T). PPTP client.

Firewall : SPI (Stateful Packet Inspection), NAT (Network Address Translation), NATP (Network Address Port Translation), DoS (Denial of Service), Access control by group, ICMP filter for WAN, Ping of Death, Port Scan, Packet filter, URL block, Session Control.

QoS (Quality of Service) : Policy priority set by source and destination IP, source and destination MAC address and service types or ToS (Type of Service) in IP Header.

Security : Changeable Admin user name and Admin password. Authentication with UPAP and CHAP for PPPoE.

Management : Management through WAN & LAN ports. HTTPS (SSL 128 bit encryption) or HTTP web based management. Email alert on WAN port failures, Syslog, SNMP.

Applications : Support for MSN and Netmeeting, Support for H.323 VoIP products, Multi session PPPoE, SMTP binding, Protocol binding, SNMP, UPnP (Enable / Disable), Configurable NAT, NAT status and connection lists (Many to One, One to One), Virtual Server and Special Application, Multi DMZ, Changeable MTU for WAN, Dial-on-demand and Auto-disconnect, Dynamic DNS, MAC address clone, Transparent Bridge Mode (failover / load balance), LAN any IP.

Supported End User Operating Systems (OS) : Windows all current versions, Mac Os all current versions, Linux.

Firmware upgrade and system backup : HTTPS (SSL 128 bit encryption) web based download, HTTP web based download, TFTP download.

Power : DC 5V / 1.5A External AC/DC adaptor available for US, EU, UK and AU.

Operating environment : 0°C ~ 40°C (32°F ~ 104°F)

Storage Temperature : -10°C ~ 70°C (-4°F ~ 158°F)

Certifications : FCC / CE

Environmental : RoHS

Dimensions : 245 x 137 x 30 mm / 9.63 x 5.63 x 1.18 in (W x D x H)
19" rack compatible (1U)

Weight : 890 g / 1.96lbs

Warranty : Two (2) years standard warranty.

Specifications are subject to change without notice. All brand and product names are trademarks or registered trademarks of their respective holders. © 2007, 2008 Syswan Technologies, Inc. All rights reserved.