

F611E CCD IP Camera

F611E is the high-end version of F610A, equipped with a SONY high-resolution CCD sensor.

F611E IP Cameras offer a cost-effective, IP-based solution for professional security surveillance and remote monitoring, which make them an ideal choice for securing offices, shops and other indoor and outdoor facilities.



Superior image quality

F611E box IP camera deliver high quality, de-interlaced, digital video streams that are sent over an IP network.

Simultaneous MPEG-4 and Motion JPEG

MPEG-4 and Motion JPEG streams can be sent simultaneously from each channel at 30fps in all resolution. This allows users to have different viewing and recording settings that are optimized for image quality and efficient bandwidth/storage use.

Video motion detection

F611E box IP camera provides powerful event management functions including pre/post alarm image buffering. Events can be triggered for example by video motion detection and external input devices, and responses can include image upload, alarm notifications and activation of external devices such as lights, doors or alarms.


Power over Ethernet

F611E supports Power over Ethernet, allowing power to be delivered via the network, which eliminates the need for power cables and reduces installation costs.

Technical Specifications

Models	F611E (NTSC), F611E (PAL)	Alarm and event management	Events triggered by video motion detection external input or according to a schedule Image upload over FTP, email and HTTP Notification over TCP, email, HTTP and external output pre- and post alarm buffer
Image sensor	1/3" Sony Super HAD high resolution CCD sensor, 520TVL AGC, AES, AWB, Anti Color-Rolling	Connectors	RJ-45 for Ethernet 10/100 Base-T (with PoE) DC power jack Terminal blocks for 1 alarm input, 1 output Reset push switch 3.5mm jack for Mic/Line in, 3.5 mm jack for line out RCA connector
Lens	F1.6, 6.0 mm CS-Mount lens	Casing	Aluminum casing
Angle of view	53° diagonal	Memory	RAM: 64MB, Flash: 8MB
Digital zoom	10x digital	Power	12V DC, 1A, Max 5W PoE (Power over Ethernet) Built-in IEEE 802.3af
Min Illumination	0.1 Lux	Operating conditions	0-50°C (32-122°F)
S / N Ratio	More than 60dB (AGC off)	Installation, management and maintenance	ZAVIO Camera Management tool on CD and web-based configuration. Configuration of backup and restore. Firmware upgrades over HTTP, firmware available at www.zavio.com
Video compression	Motion JPEG MPEG-4 Part 2 (ISO/IEC 14496-2), Profile: SP	Minimum web browsing requirements	Pentium 4 1.8GHz (or equivalent AMD) 64MB RAM graphic cards (or equivalent on-board graphic cards) 512MB RAM Windows 98, ME, 2000, 2003, XP, Vista Mac OS Leopard 10.5
Resolutions	Motion JPEG, MPEG-4: 3 resolutions from 704x480 to 176x120 via API (NTSC) 3 resolutions from 704x576 to 176x144 via API (PAL) 2 selections via configuration web page	Supported protocols	Bonjour, TCP/IP, DHCP, PPPoE, ARP, ICMP, FTP, SMTP, DNS, NTP, UPnP, RTSP, RTP, HTTP, TCP, UDP, 3GPP/ISMA RTSP
Frame rate	Up to 30 fps at 704x480 (NTSC) Up to 25 fps at 704x576 (PAL)	Included accessories	Quick Installation Guide, CD (IP Surveillance Software, Intelligent IP Installer, User Manuals and Language Pack) mounting and connector kits, power supply 12V DC
Video streaming	Simultaneous Motion JPEG and MPEG-4 (Dual streaming) Controllable Frame rate and bandwidth, Support Unicast and Multicast Support 3GPP/ISMA RTSP (Real Time Streaming Protocol)	Video management software	ZAVIO Intelligent IP Installer_Video management software for viewing, recording and archiving up to 16 cameras See http://www.zavio.com/support.htm for more software applications
Image settings	brightness, contrast, saturation, hue Overlay capabilities: time, date, text and privacy image	Approvals	CE, FCC, RoHS
Video output	1 x Analog composite: NTSC or PAL, RCA connector 75 Ohm	Dimensions (HxWxD) and weight	79 x 55 x 49 mm (3.1" x 2.1" x 1.9") 300.5g (12oz) excl. power supply
Shutter time	Electronic Auto Iris 1/60 ~ 1/100,000 (NTSC) Electronic Auto Iris 1/50 ~ 1/100,000 (PAL)		
Audio	Two-way (full duplex) External microphone input or line input Audio compression: G.711 PCM, 8 kHz, 64 kbit/s		
Security	Multiple user access levels with password protection, HTTPS encryption		
Users	5 simultaneous users Unlimited number of users using multicast		

Physical Description

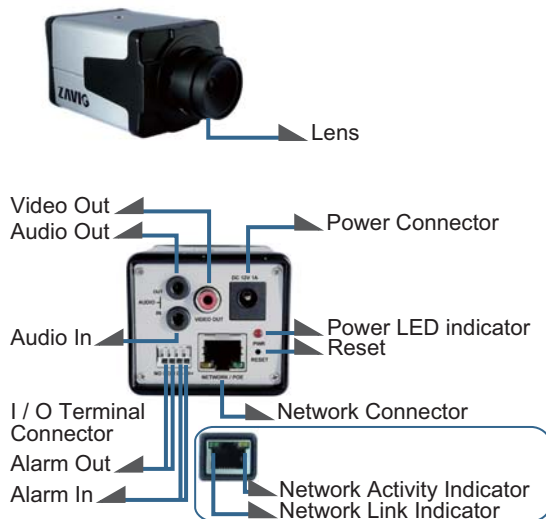

Basic Connection

