

## SB-5654


### 1x4 HDMI DISTRIBUTION AMPLIFIER

HDMI DISTRIBUTOR

Inputs : 1x HDMI (Digital Video-TMDS, Digital Audio)  
Outputs : 4x HDMI (Digital Video-TMDS, Digital Audio)



### SB-5654 HDMI DISTRIBUTION AMPLIFIER 1x4

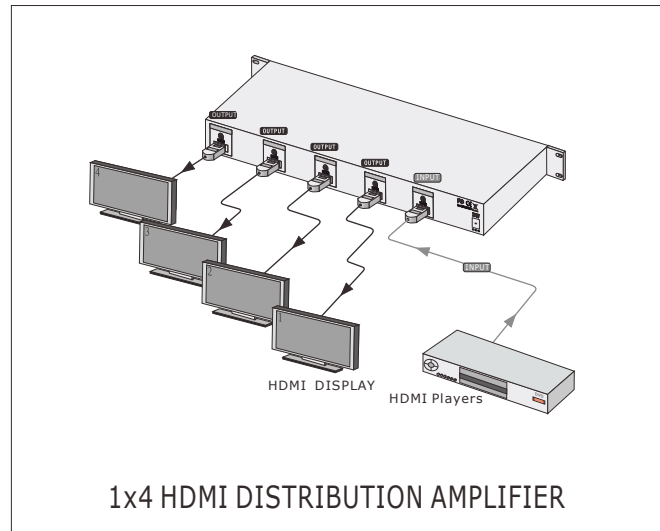

The SB-5654 is high quality HDMI distribution amplifier, high performance designed distribution HDMI signal. Providing 1 input and 4 outputs, the distributor supports data rates up to 2.25 Gbps. and enable 1080 p HDMI formats and UXGA DVI resolution to LCD and Plasma display applications. Auto scan function software is built-in to extend HDMI signal for long distance, control one inputs to 4 outputs. This product is certified as being fully HDMI and HDCP compliant. This product is also with RoHS, CE, FCC compliant. Support high resolution quality HDMI source to HDMI displays, monitors or projectors.

#### FEATURES

1. Support 1x HDMI digital A/V device Amplifier to 4x HDMI monitors
2. HDMI digital video/audio format, DVI format and HDCP compliant
3. Support HDMI/DVI high definition resolutions 408p, 720p, 1080i/1080p
4. Support link speeds of up to 2.25 Gbps (link clock rate of 225 MHz)
5. Support wide range of PC resolutions from XGA to UXGA 1600x1200 and HDTV/DTV resolutions 480i/480p, 576i/576p, 720p, 1080i & 1080p
6. Compatible with all HDMI devices, PC monitors, Plasma TV display and HDTV
7. Support Digital Video TMDS formats in Deep Color 12bits
8. Support desktop with Ear mount and 19 inch Rack mountable type panel

#### SPECIFICATIONS

1. Type of Amplifier: 1x4 HDMI Distribution Amplifier
2. Input Signals: Video (TMDS) 0.5~1.0Vpp, DDC 5Vpp
3. Signal Supports : HDMI Standard, DVI and HDCP Compliant
4. Video Supported: 1080p HDMI formats and DVI UXGA 1600x1200 HD resolutions.
5. Audio Supported: DTS-HD Master Audio, Dolby True -HD & Dolby Digital Plus
6. Controls: IR, IR EXT, Select buttons on the front panel & RS232
7. Data Rates: 250Mbps to 2.25Gbps.
8. Infrared frequency: 38KHz.
9. Safety Approvals: CE, FCC, RoHS(2002/95/EC).
10. Dimensions (LWH): 19" x 7.87" x 1.75" (482mm x 200mm x 44mm)
11. Power Supply: DC12V /1.25A
12. Shipping Weight : 2.35 Kgs / 3.68 lb