

TKG-104-MB-IP68-GREY

INDUPROOF™
Advanced



TECHNICAL SPECIFICATION KEYBOARD

Number of keys: 102 + 2 Mousebuttons
 Keyswitch technology: gold-on-gold domes
 Actuation force: 1.0 N
 Actuation travel: 0.55 mm
 Keyswitch lifetime: ca. 1 mill. operations
 Protection class (max): IP68
 Mounting type: desktop
 Material (surface): silicone
 Material (bottom panel): plastic
 Interface: PS/2; USB

PROPERTIES

Weight: 800 g
 Cable length: ca. 1.80 m
 Operating temp. range: -20 °C to +70 °C
 Storage temp. range: -25 °C to +80 °C

TECHNICAL SPECIFICATION MOUSECURSOR


Operating principle: Hall-sensor
 Resolution: 800 dpi

DIMENSION KEYBOARD

Length: 340.0 mm
 Width: 165.0 mm
 Height (with Mousebutton): 18.4 mm

FEATURES



- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- Key for switching „off“ the keyboard during a cleaning process

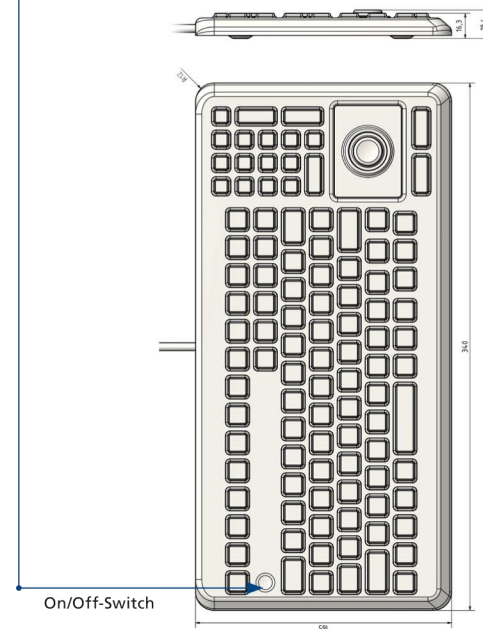

Order info:		Interface		Layout	
Cat.-No.	Product name	PS/2	USB	DE	US
KG17225	TKG-104-MB-IP68-GREY-PS/2-DE	•		•	
KG17226	TKG-104-MB-IP68-GREY-PS/2-US	•			•
KG17203	TKG-104-MB-IP68-GREY-USB-DE		•	•	
KG17204	TKG-104-MB-IP68-GREY-USB-US		•		•

Other language versions / interfaces / configurations available on request.

Techn. Drawing: TKG-104-MB-IP68-GREY

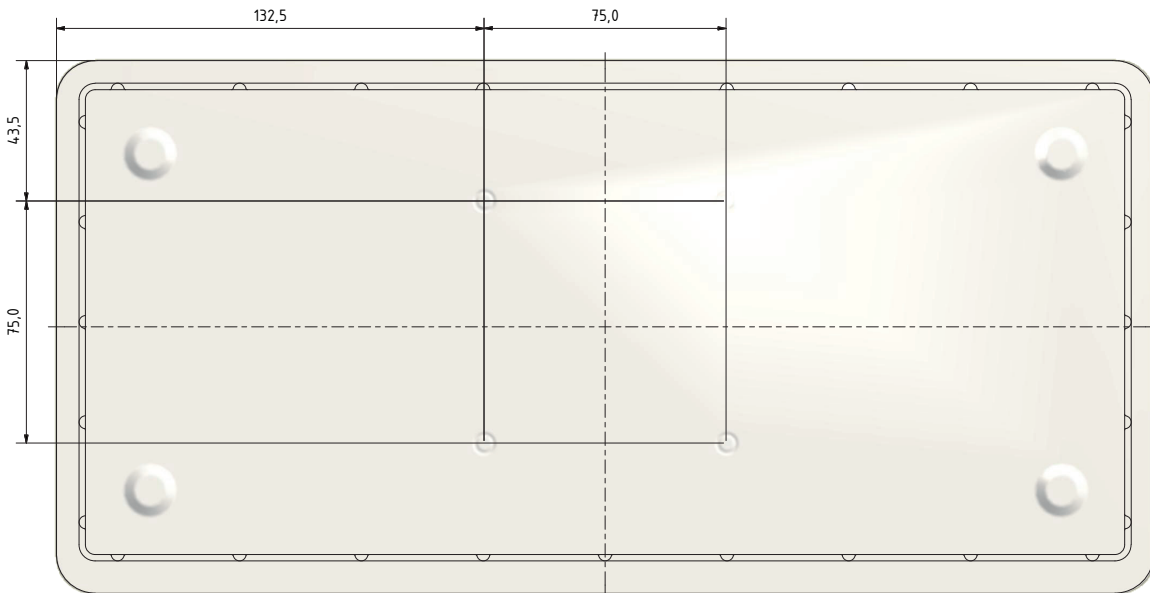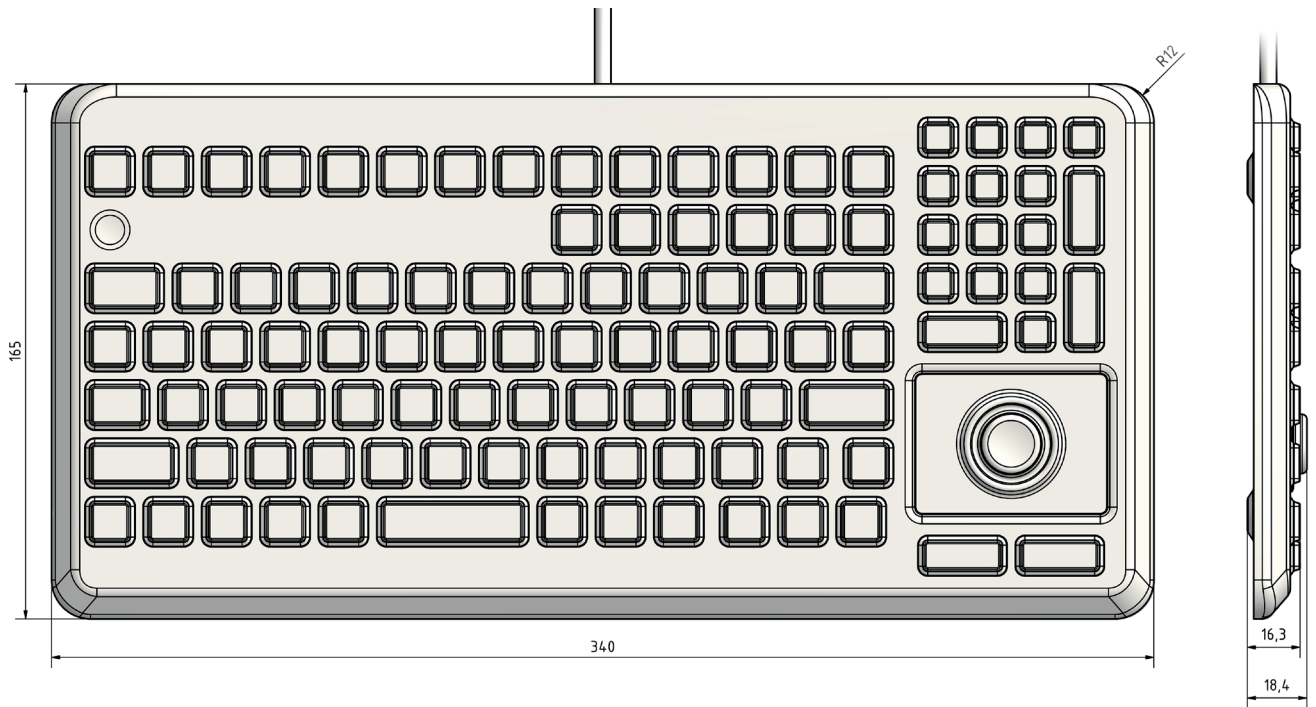

www.induproof.indukey.com

V.012009

errors and omissions excepted!