


Serial CPU Module




Rear View



Diagram

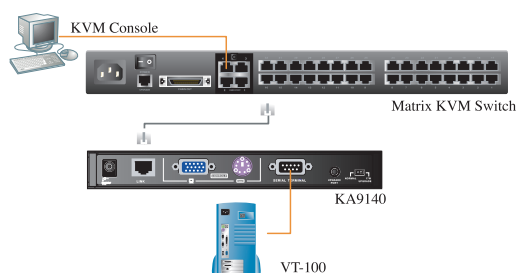

For RJ45 Matrix Type KVM

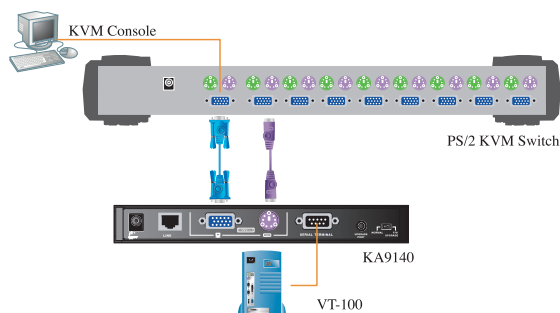

For PS/2 Type KVM

Features:

- VT-100 Support
- RJ-45 Connector - Saves valuable space on your system rack with only 0U profile.
- 150 Meter - Maximum distance from terminal to Matrix KVM Switches. Allows greater flexibility for system administrators.
- Integrated ASC (auto signal compensation) - removes the need for setting DIP switch configurations for distances.
- No Software Required - Convenient computer selection via intuitive hotkey combination or On Screen Display (OSD) Menu.

Specifications

Connectors	Computer Side	RS-232	1 x DB-9 (F) Black
	Console Side	Link	1 x RJ-45(F) Black
		Keyboard	1 x Mini-DIN-6 (F) Purple
		VGA	1 x HDB-15 (F) Blue
		Upgrade	1 x Earphone-Jack-4 (F) Black
LEDs	Power		1 x Orange@ front
	Link		1 x Green@ front
Switch	Normal / Upgrade		1 x 2way slide switch
Power Consumption			DV 5V, 1.5W
Operation Temperature			0°~ 50°C
Storage Temperature			-20°~ 60°C
Humidity			0 ~ 80% RH, NC
Enclosure			Metal
Weight			500g
Dimension			200x80x25mm

ATEN INTERNATIONAL CO., LTD.

• 3F, NO. 125, Sec. 2, Datung Rd., Shijr City, Taipei, Taiwan 221, R.O.C
• TEL:886-2-8692-6789 • FAX:886-2-8692-6767

KA9140