

**TKF-085b-TB38-MODUL**



**Modular Industrial Keyboards with integrated Pointing Device - Panel Versions**

- Keyboard with different pointing devices available
- Integrated solution
- Simple integration with studs on the reverse side
- Convenient, precise handling with the trackball
- Frontside is fully sealed
- Frontfoil with full-embossing for excellent tactile feedback
- Compact size layout, small footprint
- Various language versions available on request

**Specification Keyboard:**

Number of Keys: 85  
 Keyswitch Technology: gold-on-gold-contact with metal domes  
 Actuation Force/Travel: 2 N / 0.3 mm  
 Keyswitch Lifetime: 1 Mio. operations  
 Protection Level: IP65; NEMA 4x (frontside)  
 Electronic Interfaces: PS/2; USB  
 Connector: 6-pin MiniDIN; USB-A  
 Dimensions: 365 x 135 x 30 mm 14.37" x 5.31" x 1,18"  
 Operating Temperature: 0 °C to 50 °C  
 Frontpanel Material: PCB-material, FR4


**Specification Trackball:**

Ball diameter: 38 mm (1.5")  
 Actuation Force: 50 g  
 Keyswitch Lifetime: > 6 Mio. ball revolutions  
 Protection Level: IP65 static, IP54 dynamic; NEMA 3  
 Electronic Interfaces: PS/2; USB  
 Connector: 6-pin MiniDIN; USB-A  
 Operating Temperature: 0 °C to 50 °C

Cat.-No.	Product Name
KF2021	TKF-085b-TB38-MODUL-PS/2 PS/2; US-Layout
KF2023	TKF-085b-TB38-MODUL-USB USB; US-Layout
Other language versions/interfaces/configuration available on request	

InduKey® Keyboard Production  
 Mahnbrueck 4  
 D-08233 Treuen  
 Germany  
 Phone: +49 / 37468 / 650 0  
 Fax: +49 / 37468 / 650 50  
 eMail: info@indukey.com  
 Internet: www.indukey.com

TKF-085b-TB38-MODUL

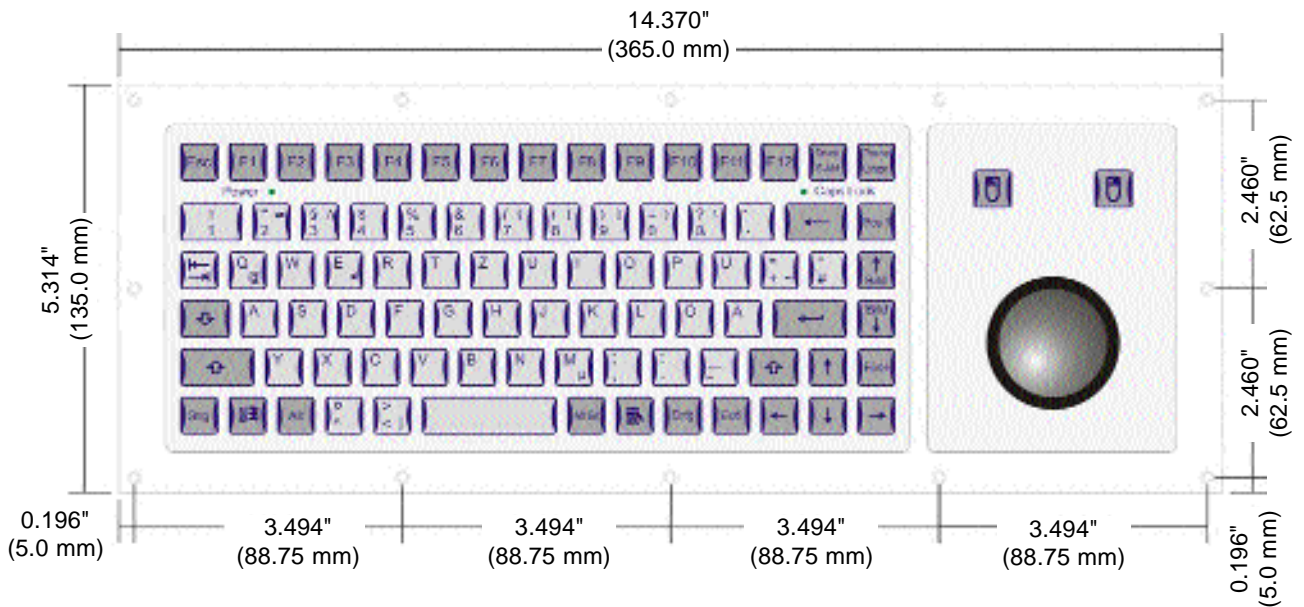

InduKey<sup>®</sup> Keyboard Production  
Mahnbrueck 4  
D-08233 Treuen  
Germany  
Phone: +49 / 37468 / 650 0  
Fax: +49 / 37468 / 650 50  
eMail: info@indukey.com  
Internet: www.indukey.com